

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
24 January 2002 (24.01.2002)

PCT

(10) International Publication Number
WO 02/05732 A1

(51) International Patent Classification⁷: **A61F 2/30,**
2/38, 2/36

(74) Agent: **LYREN, Philip, S.;** Sulzer Medica USA Inc., Suite
1600, 3 East Greenway Plaza, Houston, TX 77046 (US).

(21) International Application Number: PCT/US01/19911

(81) Designated States (*national*): AU, JP.

(22) International Filing Date: 22 June 2001 (22.06.2001)

(84) Designated States (*regional*): European patent (AT, BE,
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,
NL, PT, SE, TR).

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/619,345 19 July 2000 (19.07.2000) US

Published:


- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

(71) Applicant: **SULZER ORTHOPEDICS INC.** [US/US];
9900 Spectrum Drive, Austin, TX 78717 (US).

(72) Inventors: **KANA, Richard, J.;** Post Office Box 452, Lex-
ington, TX 78717 (US). **TAFT, Richard, J.;** 8906 Spear-
head Cove, Austin, TX 78717 (US).

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: STEM TAPER ADAPTER

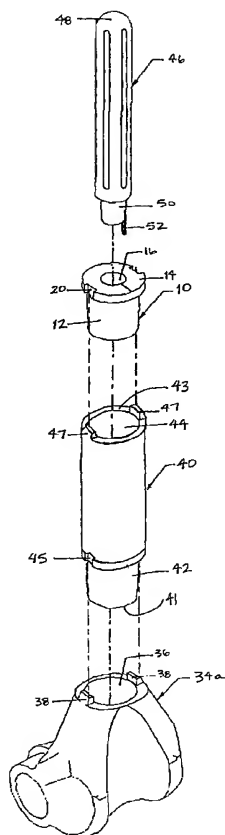

(57) Abstract: A prosthetic component includes an adaptor (10) having a first end (13) and a second end (15). The first end (13) includes an elongated male tapered body (12). The second end (15) includes a flange (14) extending radially outwardly from the male tapered body (12) and having an anti-rotational/anatomically orientation component (20) formed therewith. The second end (15) also includes a female tapered aperture (16) formed therein which has an anti-rotational/anatomical orientation component (18) formed therewith. The flange (14) may include an elongated portion (14a) having a porous annular surface (26) thereon.



WO 02/05732 A1

-1-

Stem Taper AdapterDescription5 Background Art

The disclosures herein relate generally to orthopedic implants and more particularly to combining and interconnecting various femoral and tibial prosthetic components with prosthetic stems.

10 Resection of either the femur or tibia requires implantation of a distal or proximal component to replace the resected bone. Depending on how much bone is to be resected, an additional segment may need to be implanted along with the component. These components and segments are held to the remaining healthy bone through the use of a stem, which is inserted into the intramedullary canal of a skeletal member. There are many stem configurations available to suit anatomical and surgical needs. Because it is important to keep as much healthy bone as
15 possible, and due to patient anatomical diversity and physician preferences, economic component versatility is of considerable importance.

Versatility is limited in that the femoral and tibial components of one product line are often incompatible with the stems of the same and/or a different product line. Currently, an adaptor and stem are incorporated into a single implant device. The adapter portion is used to
20 attach the stem portion to the femoral and tibial components and/or segments. Using such a single piece device creates design limitations and an increased expense in manufacturing customized pieces to meet patient needs, and increases the inventory and number of parts required to be on hand.

Also, in order to include a porous coating on the adapter portion, the single device is
25 heated to a very high temperature during the manufacturing process that may weaken the stem portion. Because of this, the single implant devices with smaller stem diameters cannot be manufactured with the porous coating without compromising the strength of the stem.

Consequently, what is needed is a universal adaptor to act as an interface between various stems and prosthetic devices, thereby allowing for more combinations of the implant devices and
30 therefore, more versatility.

Disclosure of Invention

One embodiment, accordingly, provides a surgical implantation device, which is useful for interfacing a multitude of stem choices to mate with otherwise incompatible prosthetic devices used in femoral and tibial replacement or bone conserving surgery. To this end, a prosthetic

-2-

component includes an adaptor having a first end and a second end. The first end includes an elongated male tapered body. The second end includes a flange extending radially outwardly from the male tapered body and having an anti-rotational component formed therewith. The second end also includes a female tapered aperture formed therein.

5 A principal advantage of this embodiment is that it allows physicians more versatility in customizing prosthetic implants so that they may meet the various needs of patient anatomy, and also decreases the cost of manufacturing customized pieces as well as the amount of product inventory required.

Brief Description of Drawings

10 Fig. 1 is an isometric view illustrating an embodiment of a surgical implantation device used for interfacing and connecting two incompatible surgical implantation devices.

Fig. 2 is a top view of the device in Fig. 1.

Fig. 3 is a cross-sectional view taken along the line 3-3 of Fig. 2.

15 Fig. 4 is an isometric view illustrating an embodiment of a surgical implantation device used for interfacing and connecting two incompatible surgical implantations devices and for encouraging bone and tissue regrowth.

Fig. 5 is a top view of the device in Fig. 4.

Fig. 6 is a cross-sectional view taken along the line 6-6 of Fig. 5.

20 Fig. 7 is an exploded view of an embodiment of a prosthetic component, an adaptor and a stem.

Fig. 8 is an exploded view of an embodiment of a prosthetic component, a segment, an adaptor and a stem.

Fig. 9A is an exploded view of a combination of a proximal femoral component, an adaptor, two stems, another adaptor and a distal femoral component.

25 Fig. 9B is an exploded view of another combination of the devices of 9A.

Fig. 10 is an exploded view of a stem, alternate adaptors, a distal femoral component, a proximal tibial component, additional alternate adaptors and a stem.

Best Mode for Carrying Out the Invention

30 Two versions of an adaptor 10 used for connecting surgical implantation devices are generally illustrated in Figs. 1-6, whereas Figs. 7-10 illustrate how the adaptor is used in operation.

The first version of the adaptor 10, Figs. 1-3, is a device with a first end 13 and a second end 15, the first end including a male taper 12, the second end having a flange 14 with a female tapered aperture 16 formed therein and extending into the adaptor 10. An anti-rotational and

-3-

orientation component such as a keyway 18 is formed in the female tapered aperture 16 and a plurality of diametrically opposed keyways 20 are formed in a peripheral surface of the flange 14 adjacent to the base of the male taper 12. The keyways 20 allow for an anti-rotational locking feature and an anatomical orientation feature used in connecting a corresponding device
5 (discussed below). Also, an aperture 22 extends into the female tapered aperture 16, which corresponds with an aperture of a corresponding device (not shown) which is to be connected to the adaptor. Aperture 22 is aligned with a center line 24 of the adaptor 10 and allows for the corresponding device to be securely attached with a screw or the like.

The second version of the adaptor is designated 10a, Figs. 4-6, and is substantially
10 identical to the first adaptor 10 except that the flange 14a is elongated and includes a porous annular surface 26 so as to encourage bone and tissue regrowth. Adaptor 10a also includes first end 13a, second end 15a, male taper 12a, female aperture 16a, keyway 18a, aperture 22a and centerline 24a. However keyways 20a are formed in a portion of the flange 14a adjacent the male taper 12a and adjacent the porous annular surface 26.

15 In the embodiment of Fig. 7, a stem 46 includes a first end 48 and a second end 49, the first end 48 being rounded for facilitating insertion into an intramedullary canal. The second end 49 includes a male tapered portion 50 and an anti-rotational/orientation component such as a locating key 52 for engagement of stem 46 with the keyway 18 formed in adaptor 10, as discussed above.

20 A distal femoral component 34a includes a female tapered aperture 36 formed therein and a plurality of anti-rotational and orientation components such as diametrically opposed key members 38 projecting therefrom. The key members 38 are sized to engage the keyways 20 formed in the flange 14 of the adaptor 10 when the male tapered portion 12 of the adaptor 10 seats in the female tapered aperture 36 of component 34a. The engagement of key members 38
25 in keyways 20 provides a connection between femoral component 34a and adaptor 10.

In the embodiment of Fig. 8, a segment 40 is between femoral component 34a and adaptor 10. Stem 46 and adaptor 10 are connected as described above. However, the cylindrical segment 40 is interposed for connection between the adaptor 10 and the femoral component 34a. The segment 40 may be used to replace resected bone adjacent the distal femur. Segment 40
30 includes a first end 41 and a second end 43. The first end 41 includes a male tapered portion 42 similar to the male tapered portion 12 of adaptor 10. Thus, portion 42 seats in female aperture 36 of component 34a. A plurality of keyways 45 are formed in segment 40 for receiving the keys 38 of femoral component 34a and providing an anti-rotational/orientation connection therewith. The second end 43 of segment 40 includes a female tapered aperture 44 similar to aperture 36 of

component 34a. Also, a plurality of diametrically opposed keys 47 extend from second end 43 for anti-rotational/orientation connection with keyways 20 of adaptor 10 when male tapered portion 12 is seated in female aperture 44. Also, as discussed above, the male tapered portion 50 and locating key 52 provide for engagement of stem 46 with the keyway 18 (not shown) formed in adaptor 10.

In the embodiment of Fig. 9a, a proximal femoral component 32 includes a plurality of diametrically opposed keys 37 extending therefrom and a female tapered portion 35 formed therein. Adaptor 10 seats in tapered portion 35 and keys 37 provide for anti-rotational/orientation engagement with keyways 20 (not shown) of adaptor 10. Male tapered portion 50 and locating key 52 of stem 46 engage adaptor 10 as described above. Also, a distal femoral component 34b, includes a plurality of diametrically opposed keys 38a extending therefrom and a female tapered portion 36a formed therein. Adaptor 10a seats in tapered portion 36a and keys 38a provide for anti-rotational/orientation engagement with keyways 20a (not shown) in adaptor 10a. Also, as described above, the male tapered portion 50 and locating key 52 of stem 46 provide for engagement of stem 46 with adaptor 10a.

In the embodiment of Fig. 9b, a proximal femoral component 32a includes a plurality of diametrically opposed keys 37a extending therefrom and a female tapered portion 35a formed therein. Adaptor 10a seats in tapered portion 35a, and keys 37a anti-rotationally engage keyways 20a (not shown) of adaptor 10a. Male tapered portion 50 and locating key 52 of stem 46 engage adaptor 10a as described above. Also, the distal femoral component 34b includes the plurality of diametrically opposed keys 38a extending therefrom and the female tapered portion 36a formed therein. Adaptor 10 seats in tapered portion 36a and keys 38a engage keyways 20 (not shown) in adaptor 10. Also, as described above, the male tapered portion 50 and locating key 52 of stem 46 provide for engagement of stem 46 with adaptor 10.

In the embodiment of Fig. 10, the distal femoral component 34b includes the plurality of diametrically opposed keys 38a extending therefrom and the female tapered portion 36a formed therein. Either adaptor 10 or adaptor 10a may be seated in tapered portion 36a and keys 38a engage keyways 20 (not shown) or keyways 20a (not shown), respectively. Also, as described above, the male tapered portion 50 and locating key 52 of stem 46 provide for engagement of stem 46 with either adaptor 10 or adaptor 10a. Also, a proximal tibial component 30 includes a plurality of diametrically opposed keys 31 extending therefrom and a female tapered portion 33 formed therein. Either adaptor 10 or adaptor 10a may be seated in tapered portion 33 and keys 31 engage keyways 20 (not shown) or keyways 20a (not shown), respectively. Also, as described

-5-

above, the male tapered portion 50 and locating key 52 of stem 46 provide for engagement of stem 46 with either adaptor 10 or adaptor 10a.

The principal advantages of the adaptors are that they allow for varying combinations so that a physician may customize the prosthetic implant to fit patient needs. Also, to include the
5 porous coating on only the adaptor does not require the stem to be heated to a very high temperature during the manufacturing process. Because of this, the stems are not subjected to the high temperatures and their strength is not compromised. Consequently, versatility is provided including the ability to combine devices of different systems and/or product lines. The adaptor adds such versatility by functioning as an interface between the components and stems. It should
10 be understood that the keys and keyways may be reversed so that the result of an anti-rotational/orientation engagement between two interconnected parts is still achieved.

As a result, one embodiment provides an orthopedic implant including a prosthetic component connected to a segment used for replacing resected bone, a stem which is incompatible for connection directly to the segment, and an adaptor. The adaptor has a first end
15 sized to connect directly to the segment and a second end sized to connect directly to the stem, thereby providing a compatible interface between the segment and the stem.

Another embodiment provides an orthopedic implant including a prosthetic component, a stem which is incompatible for connection directly to the component, and an adaptor. The adaptor has a first end sized to connect directly to the component and a second end sized to
20 connect directly to the stem, thereby providing a compatible interface between the component and the stem.

Still another embodiment provides an orthopedic implant including a prosthetic component connected to a segment used for replacing resected bone, a stem which is incompatible for connection directly to the segment, and an adaptor which has an elongated
25 portion including a porous annular surface. The adaptor has a first end sized to connect directly to the segment and a second end sized to connect directly to the stem, thereby providing a compatible interface between the segment and the stem.

A further embodiment provides an orthopedic implant including a prosthetic component, a stem which is incompatible for connection directly to the component, and an adaptor which has
30 an elongated portion including a porous annular surface. The adaptor has a first end sized to connect directly to the component and a second end sized to connect directly to the stem, thereby providing a compatible interface between component and the stem.

Although illustrative embodiments have been shown and described, a wide range of modification change and substitution is contemplated in the foregoing disclosure and in some

instances, some features of the embodiments may be employed without a corresponding use of other features. Accordingly, it is appropriate that the appended claims be construed broadly and in a manner consistent with the scope of the embodiments disclosed herein.

WHAT IS CLAIMED IS:

1. An orthopedic implant comprising:
a prosthetic component;
a segment for replacing resected bone, the segment being connected to the prosthetic
5 component;
a stem being incompatible for connection directly to the segment; and
characterized by
an adaptor for providing a compatible interface between the segment and the stem, the
adaptor having a first end sized to connect directly to the segment and having a second end sized
10 to connect directly to the stem.
2. The implant as defined in claim 1 wherein the segment and the stem are anti-rotationally
connected and anatomically oriented to the adaptor.
3. The implant as defined in claim 2 wherein the adaptor has a first end with an elongated
male tapered body and a second end with a flange extending radially outwardly from the male
15 tapered body.
4. The implant as defined in claim 3 wherein the second end also includes a female tapered
aperture formed therein.
5. The implant as defined in claim 4 wherein the female tapered aperture has an anti-
rotational component formed therein.
- 20 6. The implant as defined in claim 5 wherein the flange has a porous annular surface.

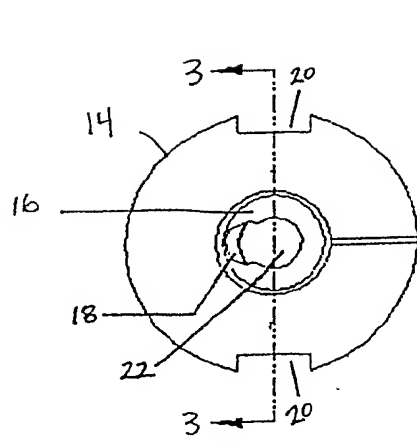


FIG. 2

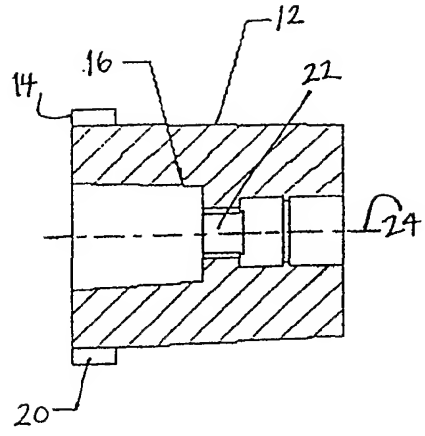


FIG. 3

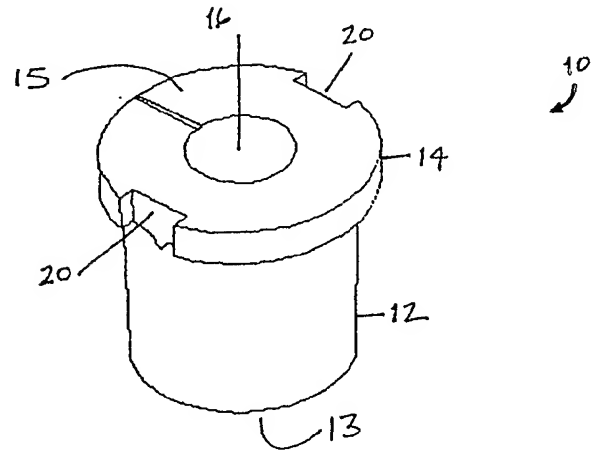


FIG. 1

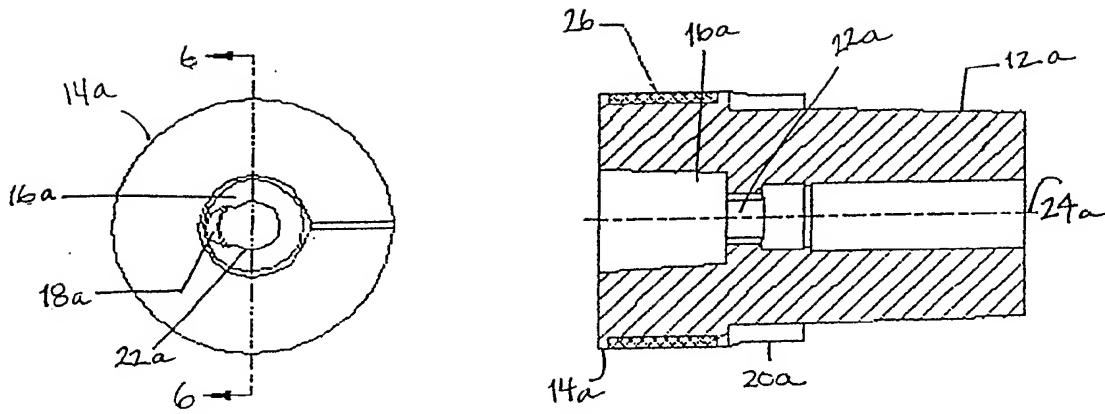


FIG. 5

FIG. 6

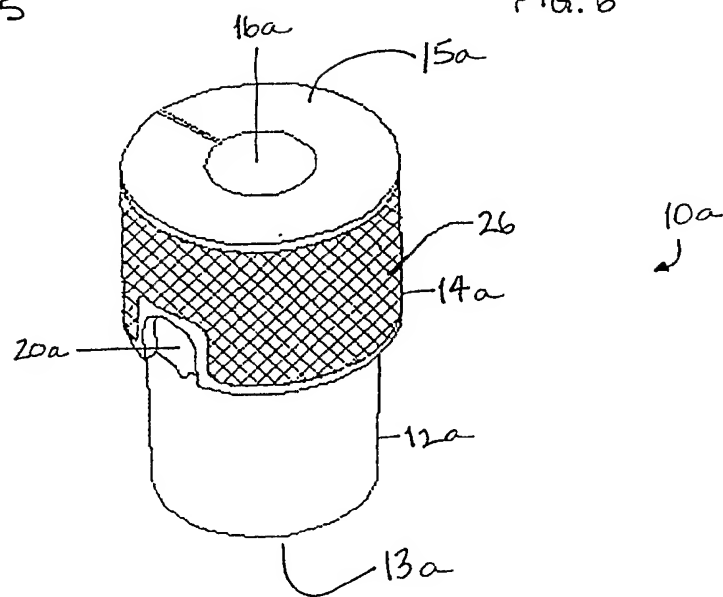


FIG. 4

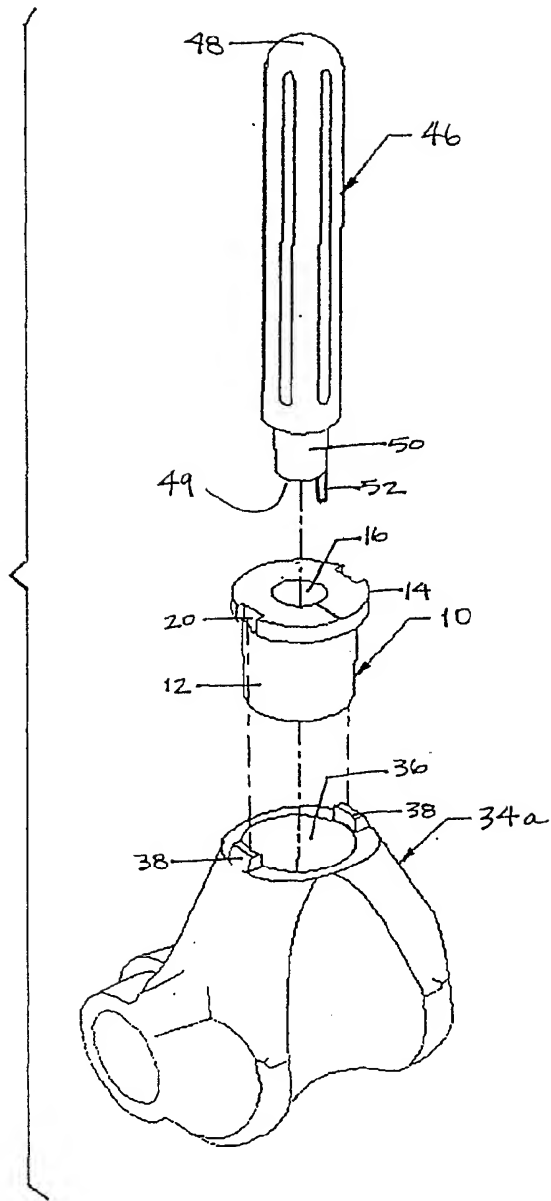


FIG. 7

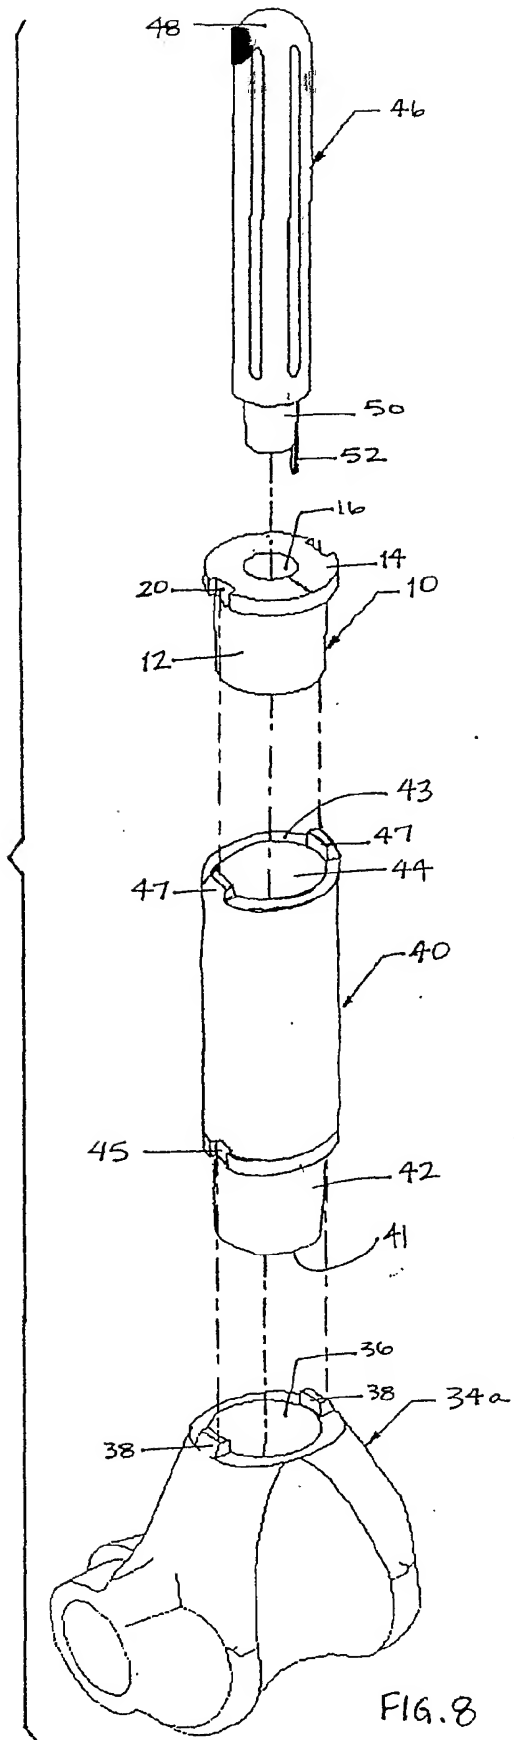


FIG. 8

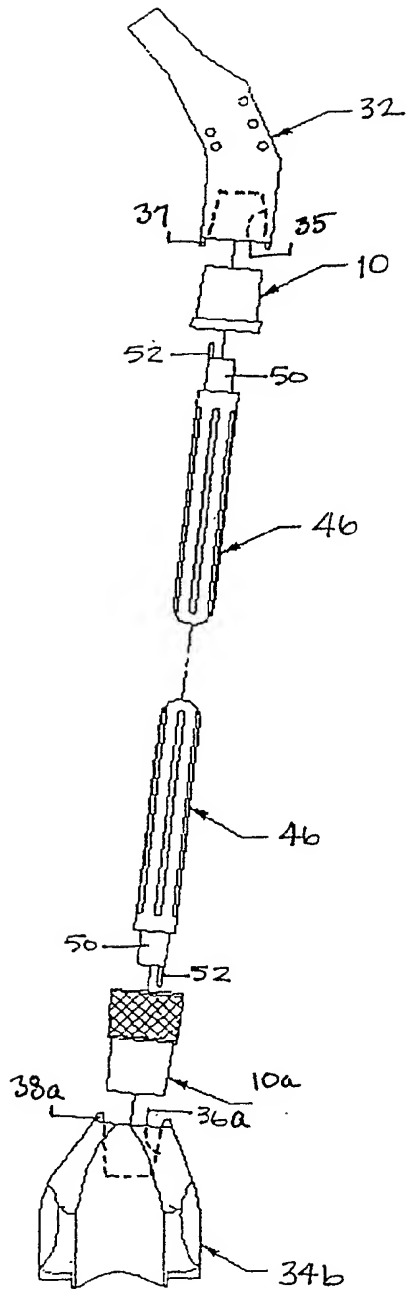


FIG. 9A

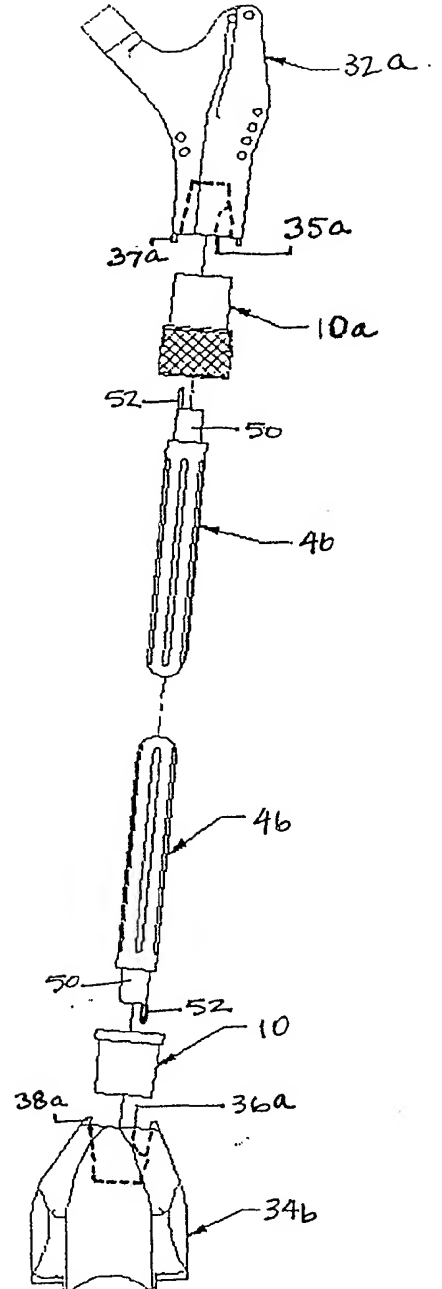


FIG. 9B

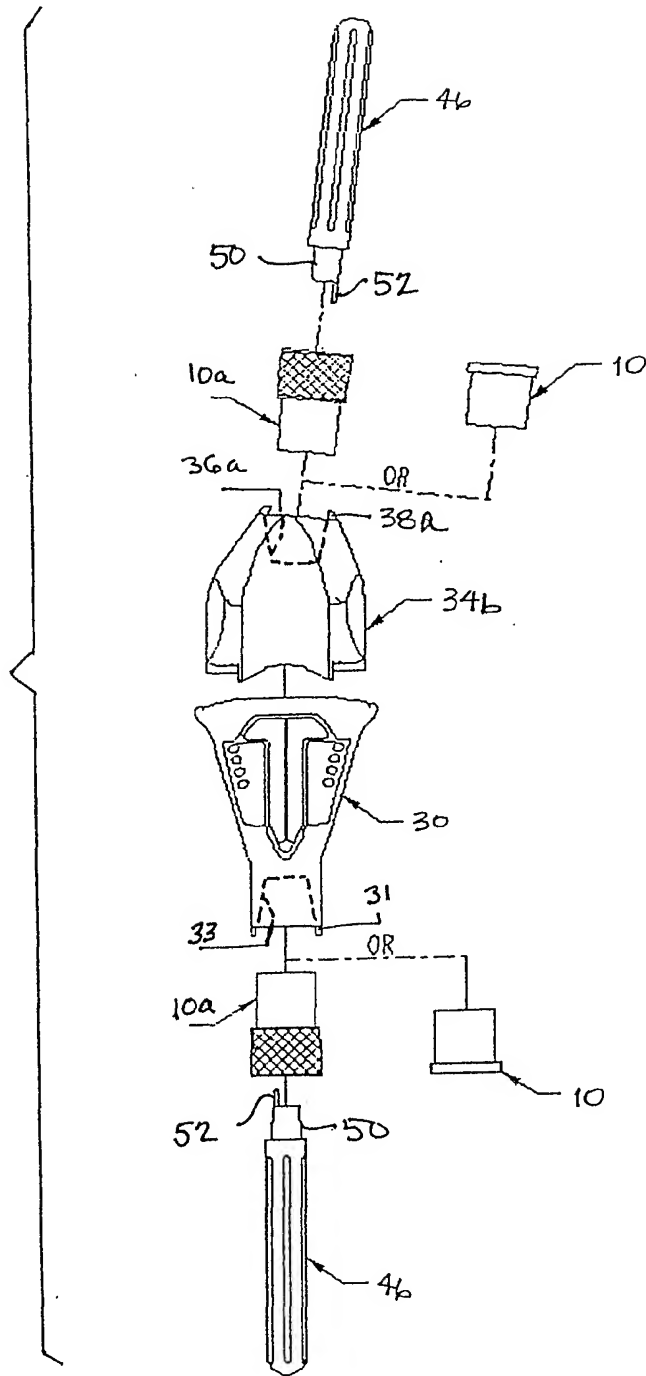


FIG. 10

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/19911

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A61F2/30 A61F2/38 A61F2/36

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 834 758 A (LANE) 30 May 1989 (1989-05-30)	1-3
Y	column 9, line 21 -column 10, line 24; figures 31-65	4
A	---	6
Y	DE 195 17 275 A (BREHM) 14 November 1996 (1996-11-14)	4
A	the whole document	1
X	DE 35 35 158 A (GMT GESELLSCHAFT FÜR MEDIZINISCHE TECHNIK) 9 April 1987 (1987-04-09)	1,2
	the whole document	
A	GB 2 070 939 A (HOWMEDICA INTERNATIONAL) 16 September 1981 (1981-09-16)	1-3
	the whole document	

	-/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

19 December 2001

Date of mailing of the international search report

02/01/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Klein, C

INTERNATIONAL SEARCH REPORT

Inter national Application No

PCT/US 01/19911

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 781 535 A (JOHNSON & JOHNSON PROFESSIONAL) 2 July 1997 (1997-07-02) the whole document ----	1, 2, 5
A	US 4 011 602 A (RYBICKI) 15 March 1977 (1977-03-15) the whole document ----	2, 6
A	WO 99 37241 A (SULZER ORTHOPEDICS) 29 July 1999 (1999-07-29) the whole document ----	6
A	DE 33 36 005 A (SCHÜTT UND GRUNDEI) 18 April 1985 (1985-04-18) ----	
A	DE 40 31 520 A (IMPLANTCAST FEINGUSS) 9 April 1992 (1992-04-09) ----	
A	US 5 352 227 A (O'HARA) 4 October 1994 (1994-10-04) ----	
A	WO 96 02203 A (SMITH & NEPHEW RICHARDS) 1 February 1996 (1996-02-01) ----	
A	EP 0 966 928 A (JOHNSON & JOHNSON PROFESSIONAL) 29 December 1999 (1999-12-29) ----	
A	EP 0 924 024 A (BIOMET) 23 June 1999 (1999-06-23) ----	
A	EP 0 163 121 A (WALDEMAR LINK) 4 December 1985 (1985-12-04) -----	

INTERNATIONAL SEARCH REPORT

Information on patent family members

Inte Application No

PC 1, US 01/19911

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4834758	A	30-05-1989	NONE	
DE 19517275	A	14-11-1996	DE 19517275 A1	14-11-1996
DE 3535158	A	09-04-1987	DE 3535158 A1 EP 0228511 A2	09-04-1987 15-07-1987
GB 2070939	A	16-09-1981	AT 388657 B AT 65882 A DE 3205577 A1 IE 50750 B1 US 4404691 A	10-08-1989 15-01-1989 28-10-1982 09-07-1986 20-09-1983
EP 781535	A	02-07-1997	US 5683472 A CA 2193779 A1 EP 0781535 A2 JP 9294756 A	04-11-1997 30-06-1997 02-07-1997 18-11-1997
US 4011602	A	15-03-1977	NONE	
WO 9937241	A	29-07-1999	US 6127596 A WO 9937241 A2	03-10-2000 29-07-1999
DE 3336005	A	18-04-1985	DE 3336005 A1	18-04-1985
DE 4031520	A	09-04-1992	DE 4031520 A1	09-04-1992
US 5352227	A	04-10-1994	NONE	
WO 9602203	A	01-02-1996	US 5620445 A AT 199121 T AU 688085 B2 AU 3099695 A CA 2195012 A1 DE 69520105 D1 DE 69520105 T2 EP 0777447 A1 JP 11506346 T WO 9602203 A1	15-04-1997 15-02-2001 05-03-1998 16-02-1996 01-02-1996 22-03-2001 21-06-2001 11-06-1997 08-06-1999 01-02-1996
EP 966928	A	29-12-1999	US 6063122 A EP 0966928 A2 JP 2000033095 A	16-05-2000 29-12-1999 02-02-2000
EP 924024	A	23-06-1999	US 6067701 A EP 0832620 A2 EP 0924024 A2	30-05-2000 01-04-1998 23-06-1999
EP 163121	A	04-12-1985	DE 3417609 A1 AT 36235 T DE 3564188 D1 EP 0163121 A1 ES 286657 U US 4658808 A	14-11-1985 15-08-1988 15-09-1988 04-12-1985 16-03-1986 21-04-1987